

# AQUAMATIC® K52 SERIES COMPOSITE CONTROL VALVES

CONSTRUCTED OF CORROSION-RESISTANT MATERIALS



## FEATURES/BENEFITS

The unique Y-pattern design with large seat opening and high lift disc permits higher flow rates at lower pressure loss than other comparable valves

All components can be serviced while the valve is in-line

Separate flow and control chambers permit positive closing without springs

Pre-formed, stress-relieved diaphragm minimizes fatigue, maximizes valve responsiveness and diaphragm lifetime

Diaphragm acts as an actuator, eliminating the need for electric or pneumatic actuators

All internal parts in contact with media are made of composite materials\*

Seals are ethylene propylene for better chemical resistance\*\*

K52 Series Valves are available in sizes from 1/2" - 2"

A variety of available end connectors make the valve compatible for 3/8"-3" pipe sizes

Adaptable to a wide variety of control devices

## OPTIONS

Normally open [standard]

Normally closed\*

Spring-assist closed

Spring-assist open

Limit stop for flow control

Position indicator

Seal and diaphragm materials for special applications

Union End Connectors - Female socket weld connectors for easy installation and the ability to remove the valve without disrupting the service piping

## TYPICAL APPLICATIONS



Chemical Injection  
Deionizers  
Desalinization  
Detergent and Bleach Handling  
Electronic Industry  
Evaporation

Fertilizer Spray Equipment  
Level Control Systems  
Metal Recovery Systems  
Mining Wastes  
Process Water Systems  
Water Treatment Systems


\*Normally closed valve configurations are NOT recommended when used with corrosive fluids.  
\*\* Valves are NOT recommended for use with any aromatic, hydrocarbon-based media.

## DIMENSIONS


MODEL #	PIPE SIZE	DIMENSIONS (APPROXIMATE)					
		A	B	C	D	E	F
K520	1/2"	7" (177.8 mm)	2.62" (66.5 mm)	4.87" (123.7 mm)	-	-	-
K521	1"	9" (228.6 mm)	4.06" (103.1 mm)	6.31" (160.3 mm)	-	-	-
K524	1-1/2"	12.5" (317.5 mm)	5.06" (128.5 mm)	9.31" (135.0 mm)	-	-	-
K524	2"	10.50" (266.7 mm)	5.06" (128.5 mm)	-	-	-	-
K526	2-1/2"	15" (381.0 mm)	7.31" (185.7 mm)	-	-	-	-
K524	2"	10.5" (266.7 mm)	5.06" (128.5 mm)	-	-	-	-
K526	2-1/2"	15" (381.0 mm)	7.31" (185.7 mm)	-	-	-	-
K520	1/2"	7" (177.8 mm)	2.62" (66.5 mm)	3.93" (99.8 mm)	-	-	-
K521	1"	9" (228.6 mm)	4.06" (103.1 mm)	4.50" (114.3 mm)	-	-	-
K524	1-1/2"	12.5" (336.5 mm)	5.06" (128.5 mm)	7.75" (196.8 mm)	-	-	-
K524	2"	9" (226.6 mm)	5.06" (128.5 mm)	6.00" (152.4 mm)	.75" (19.05 mm)	4.75" (120.85 mm)	.688" (174.8 mm)
K525	2-1/2"	11.37" (288.8 mm)	7.31" (185.7 mm)	6.94" (176.3 mm)	.94" (23.9 mm)	5.50" (139.7 mm)	6.88" (174.8 mm)
K526	3"	12.37" (314.2 mm)	7.31" (185.7 mm)	7.38" (187.5 mm)	1.81" (45.9 mm)	6.000" (152.4 mm)	.750" (19.05 mm)

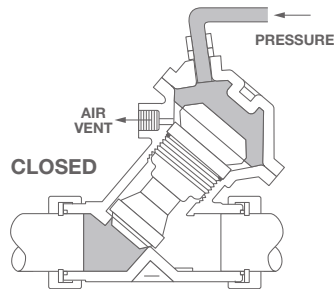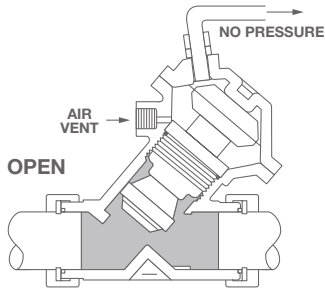


Union End Connectors

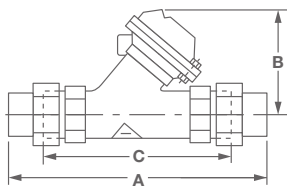


Female Socket Weld End Connectors

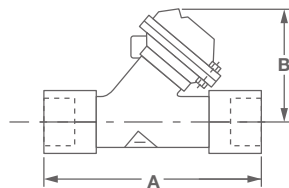


Male Socket Weld End Connectors

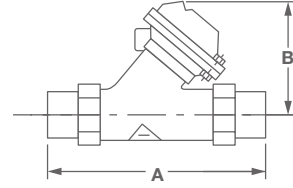

Grooved Adaptor Connectors

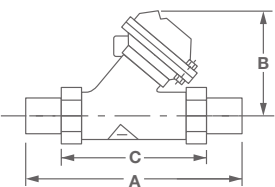


Flanged Socket Weld End Connectors




## OPERATING SPECIFICATIONS

Max Pressure 125 psi (8.6 bar)  
 Max Temperature 140°F (60°C)

## PERFORMANCE DATA

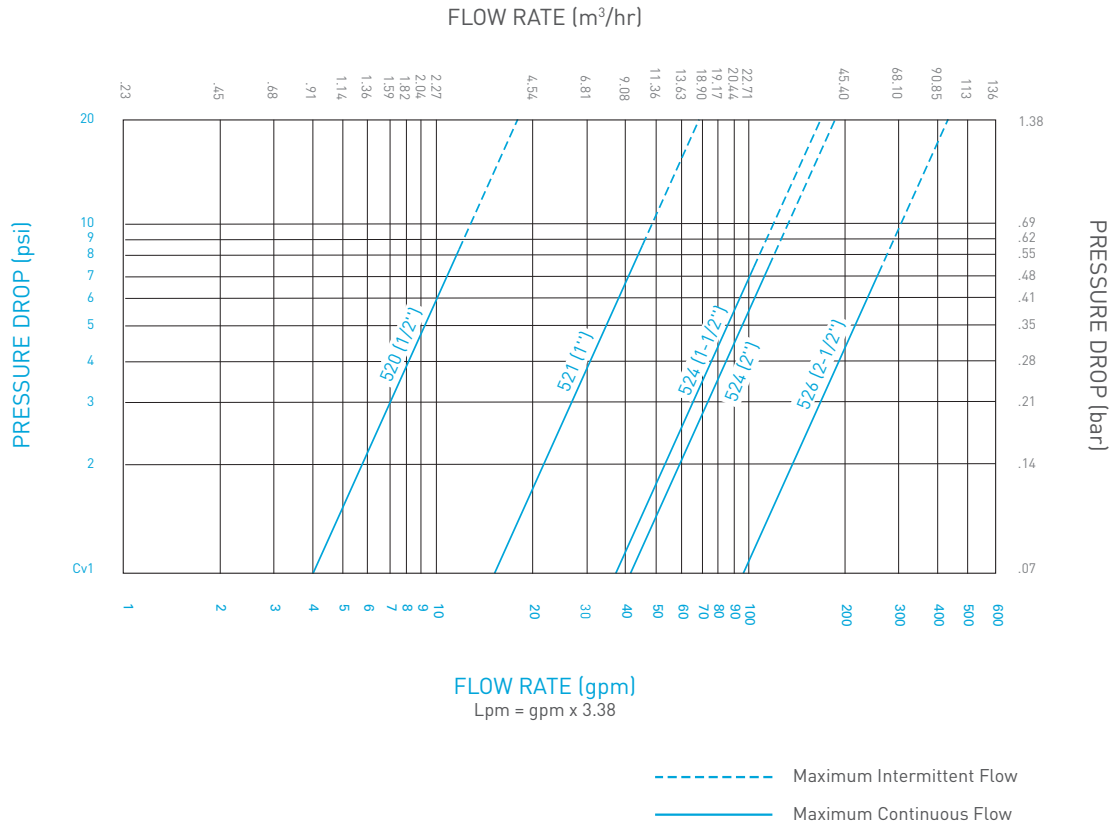

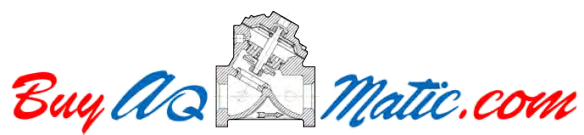

Buy AqMatic Valves | [www.buy-aq-matic-valves.com](http://www.buy-aq-matic-valves.com) | Tel: 336.462.1926

© 2016 Buy AQ Matic Valves. All rights reserved. All AQ Matic trademarks and logos are owned by AQ Matic and are used with its permission. All other registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, AQ Matic reserves the right to change specifications without prior notice.